AD-A179 700 RT DOCUMENTATION PAGE 16. RESTRICTIVE MARKINGS 3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release. 26. DECLASSIFICATION/DOWNGRADING SCHEDULE distribution unlimited A PERFORMING ORGANIZATION REPORT NUMBER(S) 5. MONITORING ORGANIZATION REPORT NUMBER(S) AFOSR-TR- 87-0366 6. NAME OF PERFORMING ORGANIZATION 7a. NAME OF MONITORING ORGANIZATION 6b. OFFICE SYMBOL (If epplicable) University of Maryland Air Force Office of Scientific Research Physics Department 76. ADDRESS (City, State and ZIP Code)
AFOSR-NP 6c. ADDRESS (City, State and ZIP Code) College Park, Maryland 20742 Building 410 Bolling AFB, Washington, D.C. 20332-6448 9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER 8. NAME OF FUNDING/SPONSORING 86. OFFICE SYMBOL ORGANIZATION (If applicable) H10512 10. SOURCE OF FUNDING NOS Defense Advanced Research Projects Agency WORK UNIT PROGRAM PROJECT ELEMENT NO 1400 Wilson Boulevard 01102 Arlington, Virginia 22209
11. TITLE (Include Security Classification) (1) New Method in Elementary Particle Detection 12. PERSONAL AUTHOR(S) J. Weber 13a. TYPE OF REPORT 13b. TIME COVERED 14. DATE OF REPORT (Yr., Mo., Day) 15 PAGE COUNT FROM Aug. 1934 o Dec. 1986 Final March 31, 1987 16. SUPPLEMENTARY NOTATION 17. COSATI CODES 18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) FIELD GROUP SUB. GR. 19. ABSTRACT (Continue on reverse if necessary and identify by block number) Total cross sections are measured for coherent elastic scattering of antineutrinos from a reactor, incident on a single crystal of sapphire, with a mass of 100 grams. The cross section is 2.7 cm (.24. (Reprints) 59, cm. 20. DISTRIBUTION/AVAILABILITY OF ABSTRACT 21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED/UNLIMITED E SAME AS APT. EDTIC USERS 22a. NAME OF RESPONSIBLE INDIVIDUAL 22b TELEPHONE NUMBER 22c. OFFICE SYMBO Include Area Code 301-454-3527/714-856-7231

DD FORM 1473, 83 APR

EDITION OF 1 JAN 73 IS OBSOLETE.

Approved for public release, distribution unlimited

AFOSR-TR- 87-0366

New Method in Elementary Particle Detection

Sponsored by

Advanced Research Projects Agency (DOD)


ARPA Order No. 4099

Project A.O. 2309

Monitored by AFOSR/NP Under Contract

#F49620-84-C-0087

Final Report

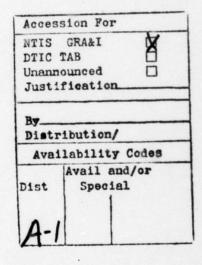



This technical report has been reviewed and i approved for public release IAW AFR 190-12. Distribution is unlimited.

MATTHEW J. HERPER
Chief, Technical Information Division

AIR FORCE OFFICE OF SCIENTIFIC RESEARCH (AFSC) NOTICE OF TRANSMITTAL TO DIIC

とくろうとうない 日本 イン・イン・イン・ショー

UNIVERSITY OF MARYLAND
DEPARTMENT OF PHYSICS AND ASTRONOMY
COLLEGE PARK, MARYLAND

87 4 23 097

Abstract

Total cross sections are measured for coherent elastic scattering of antineutrinos from a reactor, incident on a single crystal of sapphire, with a mass of 100 grams. The cross section is $2.7~{\rm cm}^2\pm~.24$.

化分分式文式管理设计设计 医多数分别 医多数分别 医多数多数多数 医多数多数 医多数多种


Introduction

A new method for observation of neutrinos and antineutrinos employs tightly coupled scatterers in a nearly perfect crystal.

Total cross sections are proportional to the square of the number of scatterers.

Published theory makes the assumption that the crystal is "infinitely stiff." Available crystals have stiffness described in a quantitative way by their Debye temperatures.

The "infinite stiffness" implies that available crystals will have the predicted cross section for low energy neutrinos. An earlier investigation employed 12 kilovolt antineutrinos from a tritium source. This report summarizes observations for 1.6 MeV antineutrinos from a nuclear reactor.

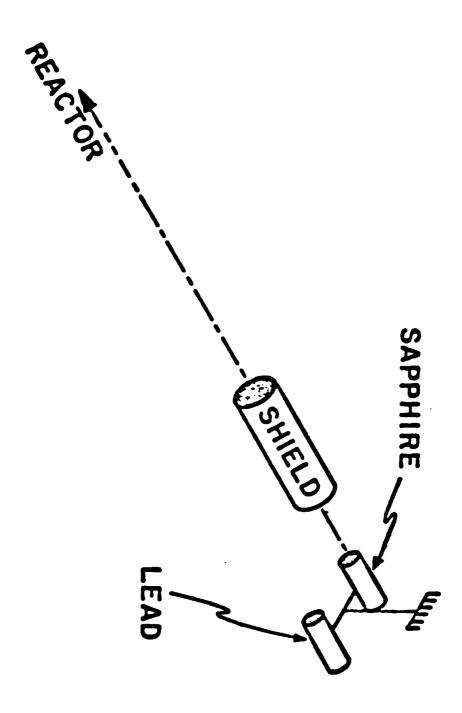

ant accessor consisted because of because of the consistent because of produced brought described from

FIGURE 1

Observations

The torsion balance arrangement shown in Figure 1 was employed. A 100 gram sapphire crystal was on one side, and a 100 gram lead mass on the other side of the balance.

An AC bridge was employed for sensing and measurements. The bridge is balanced for the equilibrium position of the torsion balance. A force applied to one of the masses will rotate the torsion balance, producing an error voltage from the AC bridge. This voltage is amplified and employed to produce electrostatic forces to restore the torsion balance to equilibrium, by a closed loop servosystem. In final equilibrium, the force resulting from elastic scattering of antineutrinos is therefore balanced by an electrical force. The servosystem integrator output measures the elastic scattering force. The system is calibrated by moving a lead brick into position and measuring the servovoltage for the known gravitational interaction between lead brick and torsion balance.

The nuclear reactor is normally on for about 40 days, then off for about one week. In order to obtain sufficient data for a reasonably precise value of the cross section, it was necessary to switch the antineutrinos on and off a large number of times.

If the large cross sections predicted by the theory are correct, a large sapphire crystal should serve as a shield for antineutrinos. The switching process is carried out by moving the shield in the line of sight between reactor and torsion balance.

At first no magnetic tape - data acquisition system was available. A series of human observer hand operated observations

was performed in the following way. With reactor on, the shield was placed in a fixed position in the line of sight. Servovoltage measurements were made with a high impedance voltmeter. Voltages were read and recorded, in ink, in a bound notebook. Similar measurements of servovoltage were made with shield removed. The procedure was repeated, with reactor off.

Torsion balance calibration was performed, when the reactor was off, by moving a lead brick close to one of the torsion balance masses, again recording servovoltage outputs.

About 5000 measurements were made, employing these procedures.

Eventually a magnetic tape - data acquisition system became available. Measurements were then carried out in the following way. The shield was driven up, then down, continuously by a motor. Synchronization voltages were written on one channel of the magnetic tape. The servosystem voltage was recorded on a separate channel. The system was left operating for more than a week, at a time when the reactor was expected to be changed from on to off or vice versa, about the middle of the recording period. Magnetic tapes were read "blind" by our computer programmer. The signal average with reactor off was then subtracted from the signal average with reactor on. In this way gravitational and magnetic forces associated with the shield were subtracted out. Figure 2 shows the effect, therefore, of reactor alone.

It was discovered that collimation was important because relatively small changes could have a large effect on the fraction of the cycle that occultation was occurring.

As an additional check, the magnetic tape - data acquisition

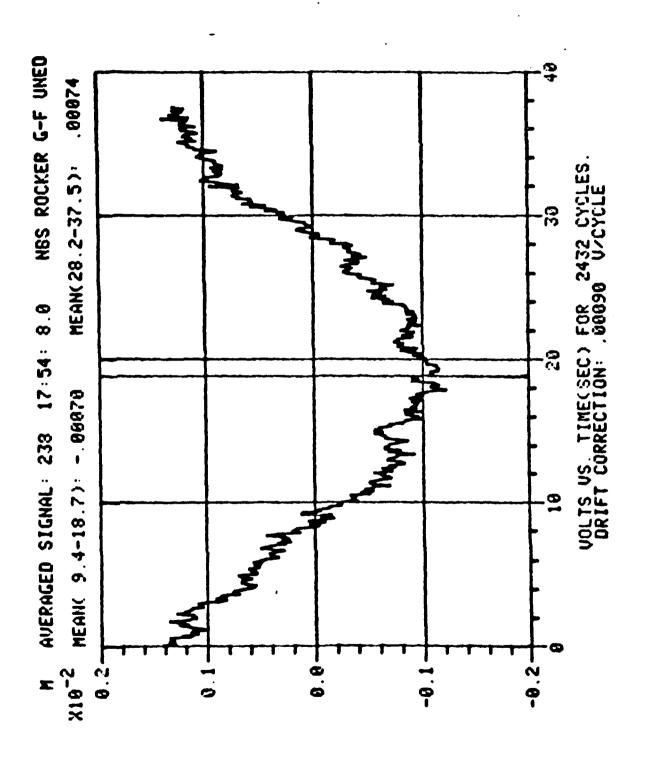


FIGURE 2

system was employed in the following way. The motor was controlled manually, and employed to move the shield into the occulting position. Data were recorded on magnetic tape. Then the motor was again operated to move the shield as far as possible away from the occulting position. Servosystem voltages were again recorded on magnetic tape. Procedures were repeated with reactor off, and with lead bricks for calibration. The magnetic tapes were read "blind."

Let us define an elastic scattering cross section for incident particles with average momentum by σ_p for incident flux ϕ . A force F is measured

$$F = \phi \sigma_p$$

For these experiments the result is

$$\sigma_{\rm p} = 2.7 \, {\rm cm}^2 \pm .24$$

Low Temperature Inelastic Scattering

An alternative method for antineutrino detection consists of observation of energy transfer from the incident antineutrinos to the spin quantum states of the nuclei of a crystal. Observations of this were in reasonable agreement with theoretical predictions. It was planned to purchase a gas handling system for a large dilution refrigerator insert, and emplace the complete system at the National Bureau of Standards. Unavailablility of funds, (\$100,000) for the gas handling system led to a decision to concentrate the effort on the elastic scattering room temperature observations.

Fluid Supported Torsion Balance

The wire supported torsion balance employed for the present experiments responds to seismic excitation. The noise background considerably exceeds the thermal fluctuation limits.

Dr. J. Faller² has suggested that a fluid be employed to float relatively large masses, and has claimed a considerable reduction in background noise. His design did not employ any wire at all. Centering was accomplished by electrostatic forces exerted on electrodes near the center of the floating structure.

We designed and constructed two systems, following Faller's suggestions. The performance was relatively poor. Limitations of time, and funds led to the decision to employ the wire supported (Cavendish) type of torsion balance for cross section measurements.

Substantial improvement in fluid supported torsion balance operation resulted from removal of the electrostatic restoring system and replacing it by a wire - so that the fluid buoyancy reduced the support wire stress to a few per cent of the value without the fluid.

Solar Neutrinos

A torsion balance similar to the one at the reactor was employed to carry out a search for solar neutrinos. A 24 hour effect was searched for as the sun apparently rotates around the balance. At this time a positive result has been obtained, consistent with the assumption that about 7×10^{10} neutrinos per cm² per second, with energy about 0.4 MeV are incident on the torsion balance. This is tentative, because search for systematic errors is continuing.

Conclusion

Large cross sections are observed for solar and reactor antineutrinos incident on nearly perfect crystals, with high Debye temperatures.

J. WEBER FOUNDATIONS OF PHYSICS, Vol. 14, 12, 1185-1209,
 Dec. 1984.

PHYSICAL REVIEW C Vol. 31, 4, 1468-1475.

 J. FALLER Proceedings of the Second Marcel Grossmann Meeting, Trieste, Italy, 1979, North Holland Publishing Company.